


T-324

Flushing of the inside of deluge rings

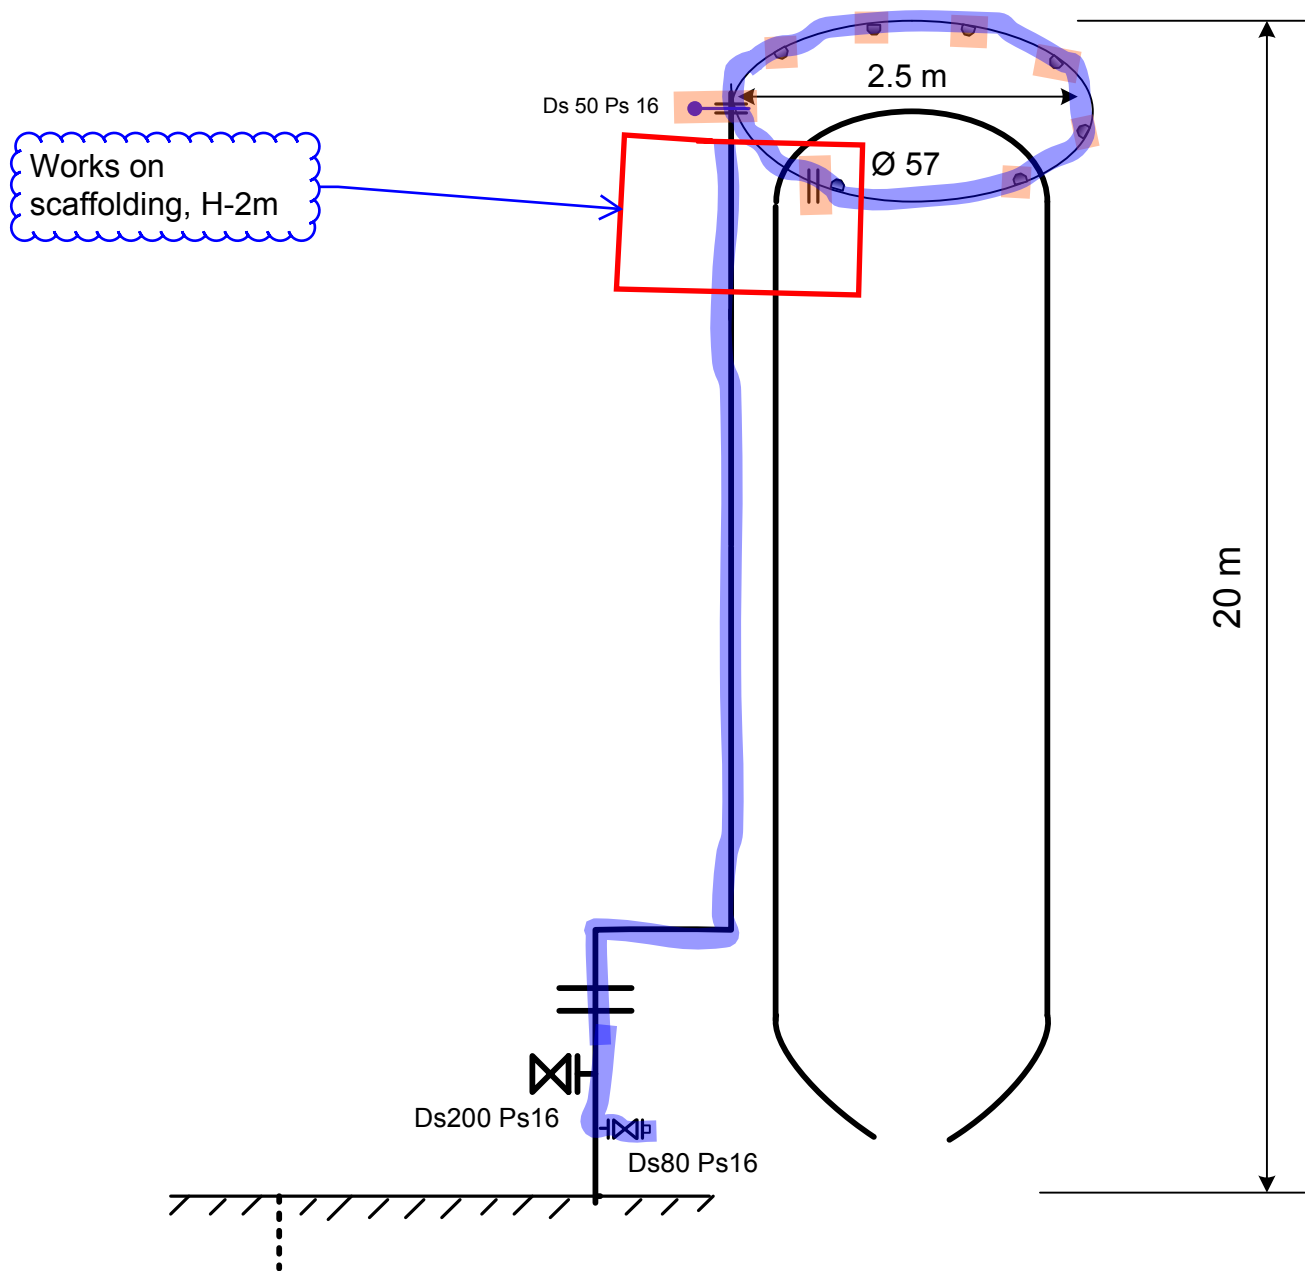

Pipeline sections /
Valve will be
removed and
installed by
another contractor

- Demounting of Ds50 Ps16 throttle washers: **1** pcs;
cleaning, reinstalling of throttles (a throttle is a
blind with a hole drilled through)
- ▣ Cleaning of throttle spray nozzles, 8
nozzles on a ring
- || Disassembling of flange pairs, re-
assembling of flanges after pipeline
washing