




SNODO GIREVOLE IN 3 PEZZI Tp.2833



(acciaio al carbonio o acciaio inox)

2833 Mod. 3 PIECES SWIVEL JOINT

(Carbon Steel or Stainless Steel made)

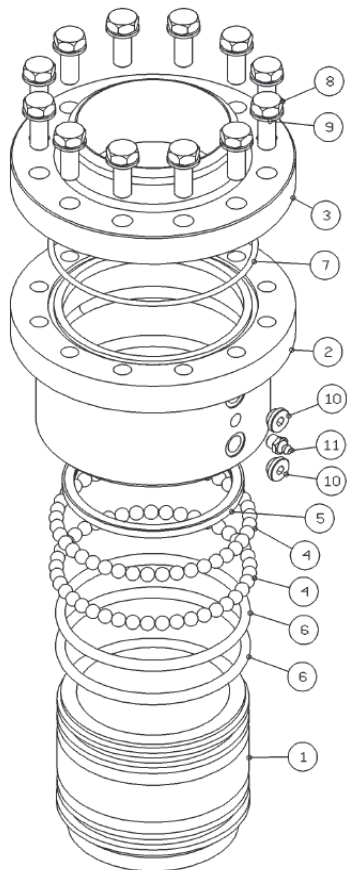

Dimensioni primarie / Dimensions

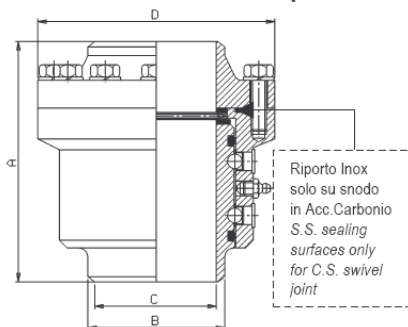

Size	A	B	C	D	Kg	Design Pressure
1.1/2"	126	48.3	41	106	4.3	40 Bar
2"	129	60.3	52	118	5.1	40 Bar
3"	155.5	88.9	78	154	8.8	40 Bar
4"	168	114.3	102	190	14.2	40 Bar
6"	215	168.3	152	240	27.7	10 Bar
8"	235	219.1	202.5	320	52.3	10 Bar
10"	252	273	254.5	390	67.6	10 Bar
12"	250	324	303	450	94.3	10 Bar

Note / Remark

- **Solo per snodo in Acc. Carbonio:** Superfici di rotolamento temperate per induzione e rettificate. Superfici di tenuta con riparto in AISI 309.
- Funzione leak-detector.
- **Only for Carbon Steel type:** Induction hardened and grinded ball bearing raceways. AISI 309 sealing surfaces
- Leak detector function.

Part.	Description	Q.ty	Material	Material
1	Maschio Sleeve	1	Acc. Carbonio Carbon Steel	AISI 304L/316L
2	Corpo dello snodo Body	1	Acc. Carbonio Carbon Steel	AISI 304L/316L
3	Flangia del corpo Body flange	1	Acc. Carbonio Carbon Steel	AISI 304L/316L
4	Sfere Balls		Acc. Carbonio Carbon Steel	Acc. Carbonio Carbon Steel
5	Anello di tenuta energizzato Energized seal	1	PTFE caricato+ELGILOY® PTFE filled+ELGILOY®	PTFE caricato+ELGILOY® PTFE filled+ELGILOY®
6	Anelli di ritegno grasso Grease O'Ring	2	BUNA N / VITON	BUNA N / VITON
7	Anello di tenuta flangia Flange O'Ring	1	BUNA N / VITON	BUNA N / VITON
8	Viti fissaggio flangia Flange screws		AISI 304L/316L	AISI 304L/316L
9	Rosette elastiche Washers		AISI 304L/316L	AISI 304L/316L
10	Tappi fermo sfere Ball plugs	2	AISI 303	AISI 303
11	Ingrassatore Grease nipple	1	AISI 420	Acc. Carbonio Carbon Steel
			ACC. CARBONIO/C.S.	ACC. INOX/S.S.